

The premium choice in crack sealing...



Henry® Duroflex Hot Pour Crack Sealant (HE093) Asphalt Crack and Joint Sealant

A premium hot melt asphalt crack sealant designed for use on asphalt and concrete streets, highways, and parking lots.

What makes it the better choice?

Only 100% new polymer is used, with no recycled polymer, rubber or reclaimed rubber, giving superior performance over a variety of temperatures and climates.

**SEE THE
BENEFITS**

▶ See back side

Benefits

Finished Product

A higher softening point to resist bumps in fresh hot mix for a smoother, better job

Weather

Will not bleed or track in hot weather

Highly polymer-modified for superior flexibility to resist cracking in cold temperatures

Drying Time

Hardens quickly and that means less delay prior to seal coating

Usage

Application


Ideal application temperature is 350°F

Can be applied using a pressure feed wand system or with a pour pot

Cracks can be filled flush or may be over filled and squeegeed

Packaging

Comes in 35 lb boxes (1 block per box)

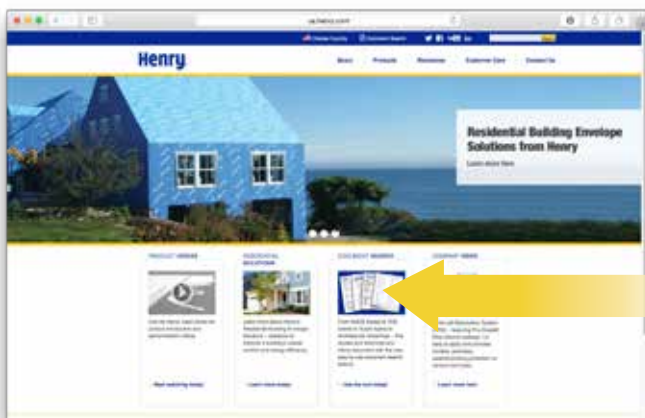

www.henry.com

Discover Henry Pavement Maintenance Systems. Products of Superior Durability

For Duroflex Technical Data Sheets and Safety Data Sheets, go to **Document Search** from the [henry.com](http://www.henry.com) homepage.

For more information, visit www.henry.com

Henry®

Henry Company
999 N. Sepulveda Blvd. Suite 800, El Segundo, CA 90245
1-800-486-1278